



RoHS

REV.	REMARK	DATE	SIGN.

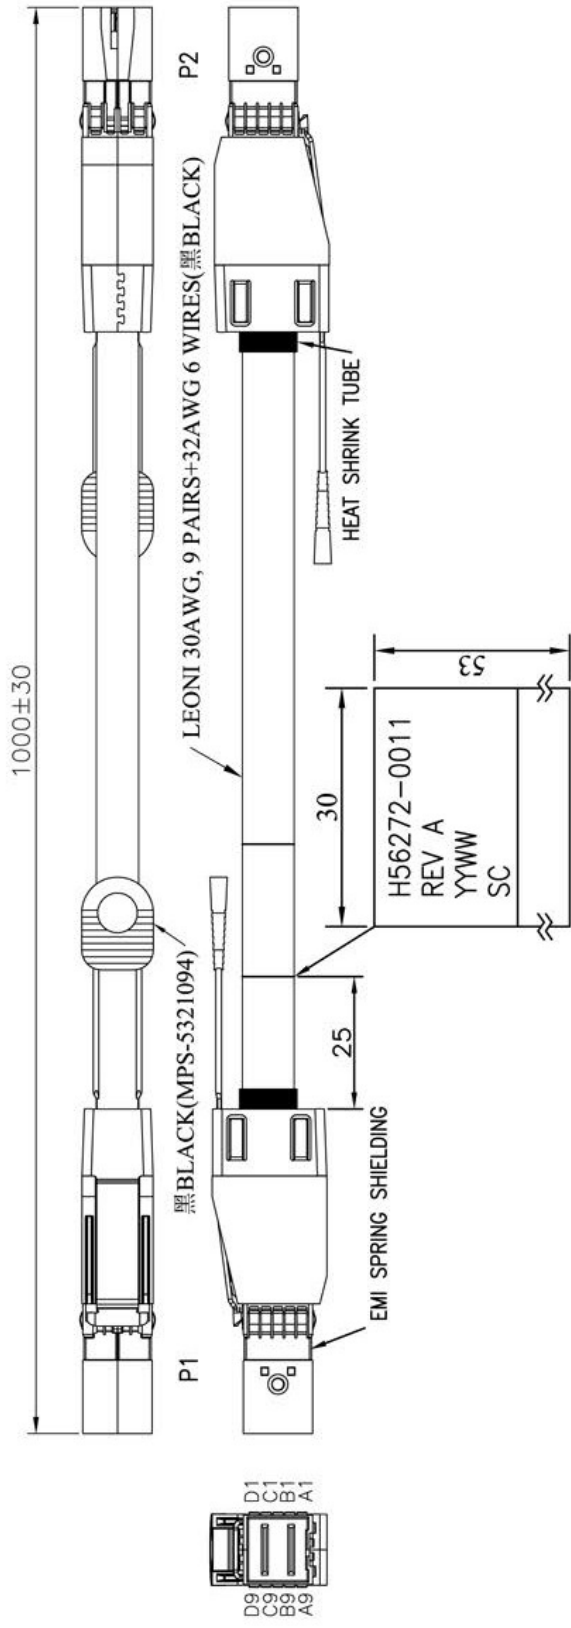

MATERIAL RoHS COMPLIANT:
 1. CABLE SPEC (LEONI ParaLink):
 9 PAIRS + 6 WIRES
 (1) 9 PAIRS/30AWG SILVER PLATED COPPER
 (2) 6 WIRES/32AWG TINNED COPPER
OVERALL SHIELD
 (1) ALUMINATE FOIL OVERLAPPED
 (2) TINNED COPPER BRAID, 85% COVERAGE
 DIAMETER: 7.6±0.3mm
 JACKET: PVC, COLOR: BLACK
ELECTRICAL:
 IMPEDANCE: 100±5 OHM (DIFFERENTIAL TDR)
 PRINT LEGEND: "LEONI High Speed Cables ParaLink®"
 1000 9pairs 30AWG+ 6x32AWG "internal lot number"
 "sequential length in metres"

2.CONNECTOR:
 P1,P2: Mini SAS HD 4x CABLE PLUG (SFF-8644)
 (1) P.C.B: 6 LAYERS, GOLD PLATING ON CONTACT PADS.
 (MPCB-060003LF REV.A / MPCB-060004LF REV.A)
 (2) LATCH: STAINLESS STEEL
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING
 (4) PULL TAB: NYLON UL94V-0, COLOR: BLACK(MPS-5321094)
 (5) EMI SPRING SHIELDING



3. LABELING ON BAG:



DESC.	MiniSASHD 4x with Sideband Cable Assembly
P/N	UASS-RC007235
CUSTOMER P/N	H56272-0011

DESIGNED	Sino
CHECKED	
APPROVED	
SCALE	
DATE	04/02/15
DWG NO:	DWG\RC\7235

REV.	REMARK	DATE	SIGN.

WIRING DIAGRAM

HIGH SPEED SIGNAL			
P1		P2	
PAD	SIGNAL	PAD	SIGNAL
A4	RX1+	C4	TX1+
A5	RX1-	C5	TX1-
A7	RX3+	C7	TX3+
A8	RX3-	C8	TX3-
B4	RX0+	D4	TX0+
B5	RX0-	D5	TX0-
B7	RX2+	D7	TX2+
B8	RX2-	D8	TX2-
C4	TX1+	A4	RX1+
C5	TX1-	A5	RX1-
C7	TX3+	A7	RX3+
C8	TX3-	A8	RX3-
D4	TX0+	B4	RX0+
D5	TX0-	B5	RX0-
D7	TX2+	B7	RX2+
D8	TX2-	B8	RX2-
GND GROUP	GND	GND GROUP	GND

P1,P2 GND GROUP:
A3,A6,A9,B3,B6,B9,C3,C6,C9,D3,D6,D9

客製化接點

LOW SPEED CLK & SIGNAL			
P1		P2	
PAD	SIGNAL	PAD	SIGNAL
A1	CLK+	A1	CLK+
A2	CLK-	A2	CLK-
B1	SB3	B1	SB3
B2	SB1	B2	SB1
C1	SB4	C1	SB4
C2	SB2	C2	SB2
D1	SB5	D1	SB5
D2	SB6	D2	SB6

客製化接點

Connector Shell	Connector Shell
-----------------	-----------------



DESC.	MiniSASHD 4x with Sideband Cable Assembly
P/N	UASS-RC007235 CUSTOMER P/N H56272-0011

SCALE	*	TOLERANCE	*
DATE	04/02/15	DWG NO:	DWG\RC\7235