





REV.	REMARK	DATE	SIGN.
◇	REMOVE S1/S0 LABEL, CHANGE HEAT SHRINK TUBE, REVISE LABEL	11/30/16	Sino
◇	CHANGE GREEN WOVEN SLEEVING, REVISE PAIRS	12/07/16	Sino

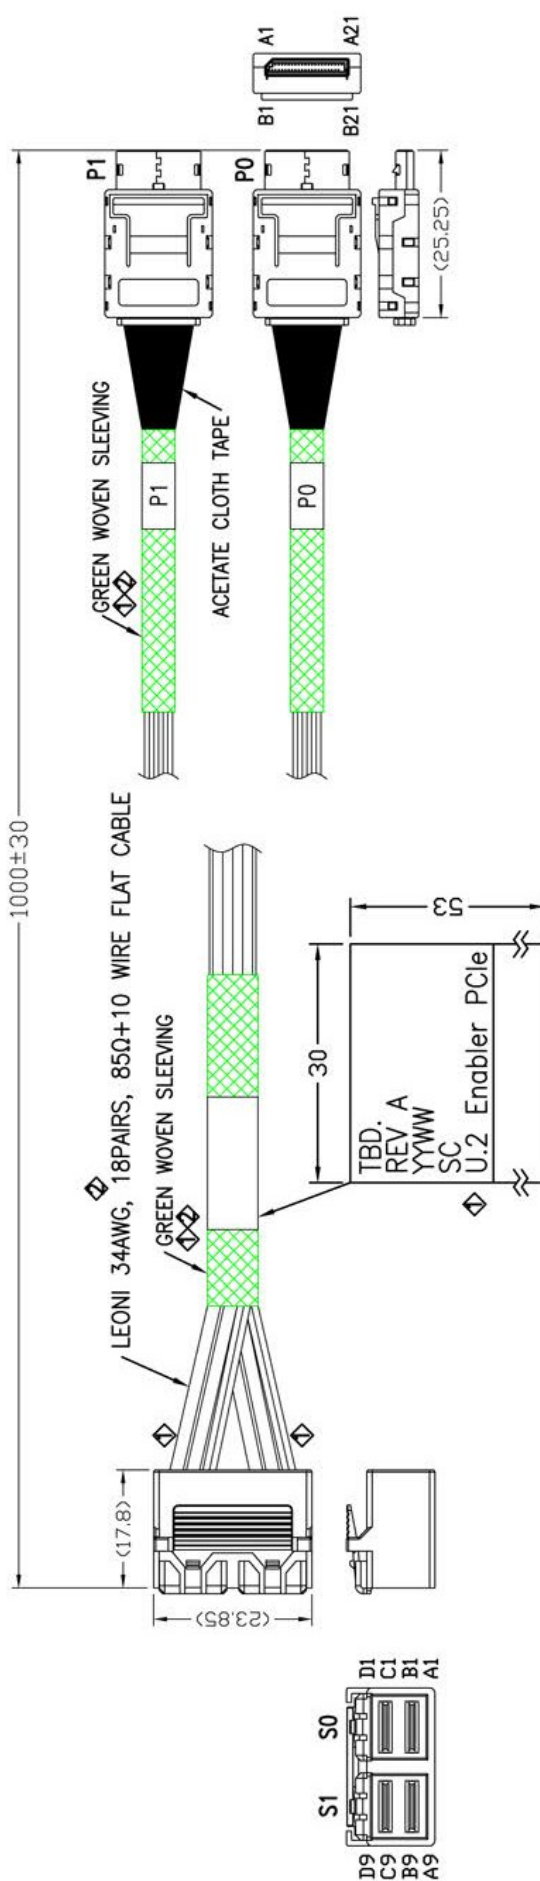

MATERIAL ROHS COMPLIANT:
 1. CABLE: LEONI PARALINK 34AWG, 12PAIRS, 85Ω
 WIRE:
 HIGH STRENGTH SILVER PLATED COPPER WIRE(34AWG)
 INSULATION OF POLYETHYLENE(PE) WH
 PARALLEL PAIR:
 2 WIRES PARALLEL
 TINNED COPPER DRAIN WIRE ø0.16mm(34AWG)
 ALUMINATE FOIL OVERLAPPED, ALU INSIDE
 BONDED PLASTIC TAPE, OVERLAPPED
 CHARACTERISTIC IMPEDANCE: (85±5)Ω

3.CONNECTOR:
 S0,S1: Mini SAS HD 8i PLUG (SFF-8643)
 (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS, WITHOUT CARBON
 (P/N: MPCB-040125LF REV.A / MPCB-040126LF REV.A)
 (2) HOUSING: PBT, BLACK.
 P0,P1: OCuLink STRAIGHT CABLE PLUG
 (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS(SPCB-040162A)
 (2) BACKSHELLS: LCP UL94-V0, COLOR: BLACK.
 (3) LATCH: STAINLESS STEEL


4.LABELING ON BAG:



DESC.	MiniSASHd8i TO OCuLink STRAIGHT Y CABLE ASSY	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
P/N	B-5779			Sino					
CUSTOMER P/N	TBD.								
DATE	12/07/16								
DWG NO:	DWG\B\5779								

1	2	3	4	5	6	7	8	9	
REV.	REMARK	DATE	SIGN.						
◇	REMOVE S1/S0 LABEL, CHANGE HEAT SHRINK TUBE, REVISE LABEL	11/30/16	Sino						
◇	CHANGE GREEN WOVEN SLEEVING, REVISE PAIRS	12/07/16	Sino						

WIRING DIAGRAM

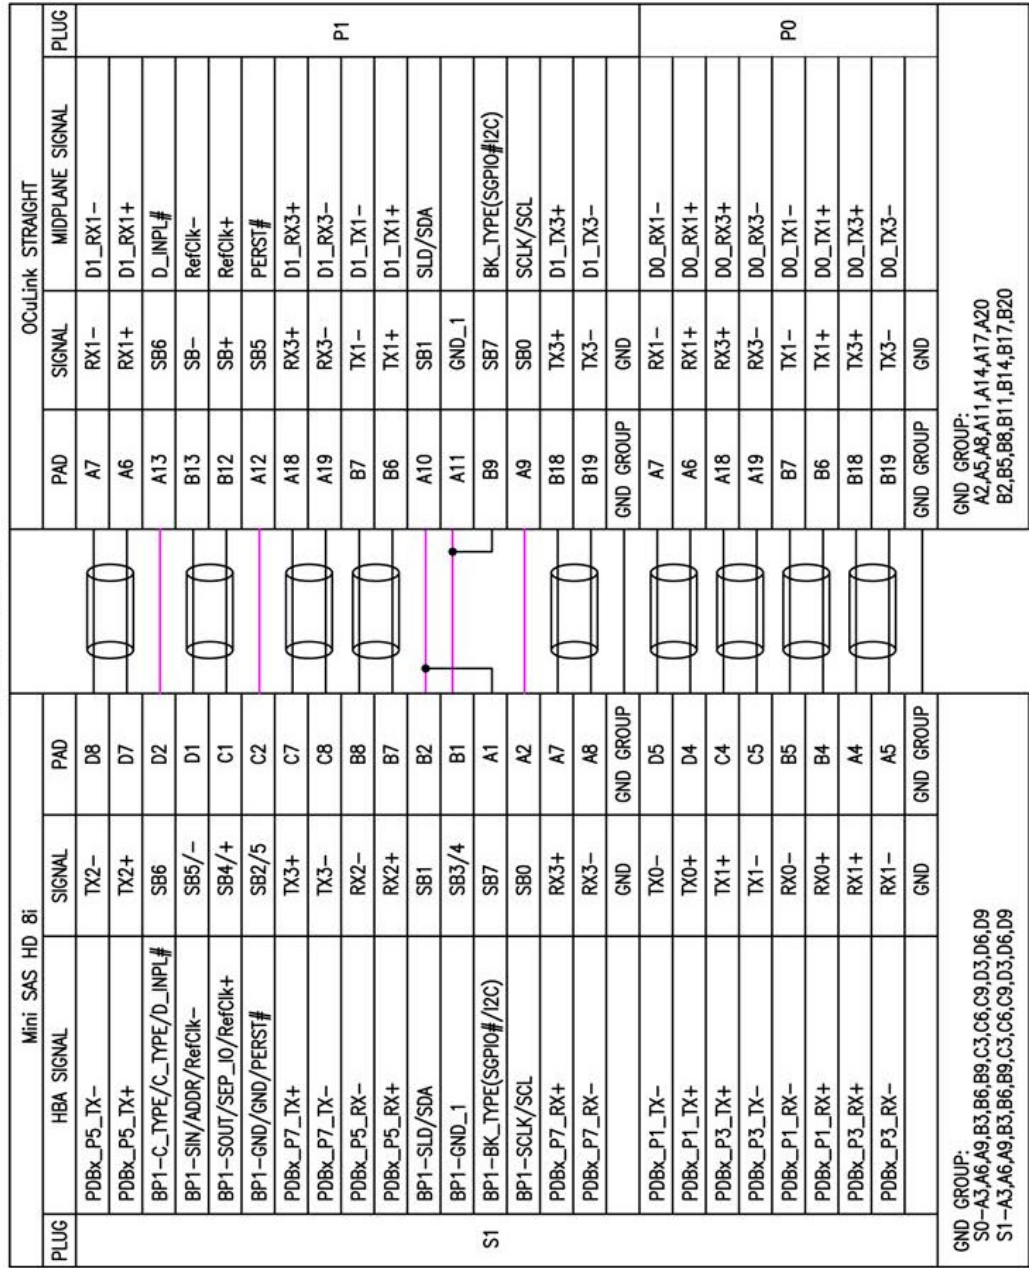

客製化接點, 第1頁




DESC.	MiniSASHD8i TO OcuLink STRAIGHT Y CABLE ASSY	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
P/N	B-5779	CUSTOMER P/N		Sino		DATE	12/07/16	DWG NO:	DWG\B\5779

REV. REMARK DATE SIGN.

1 REMOVE S1/S0 LABEL, CHANGE HEAT SHRINK TUBE, REVISE LABEL 11/30/'16 Sino

2 CHANGE GREEN WOVEN SLEEVING, REVISE PAIRS 12/07/'16 Sino

WIRING DIAGRAM

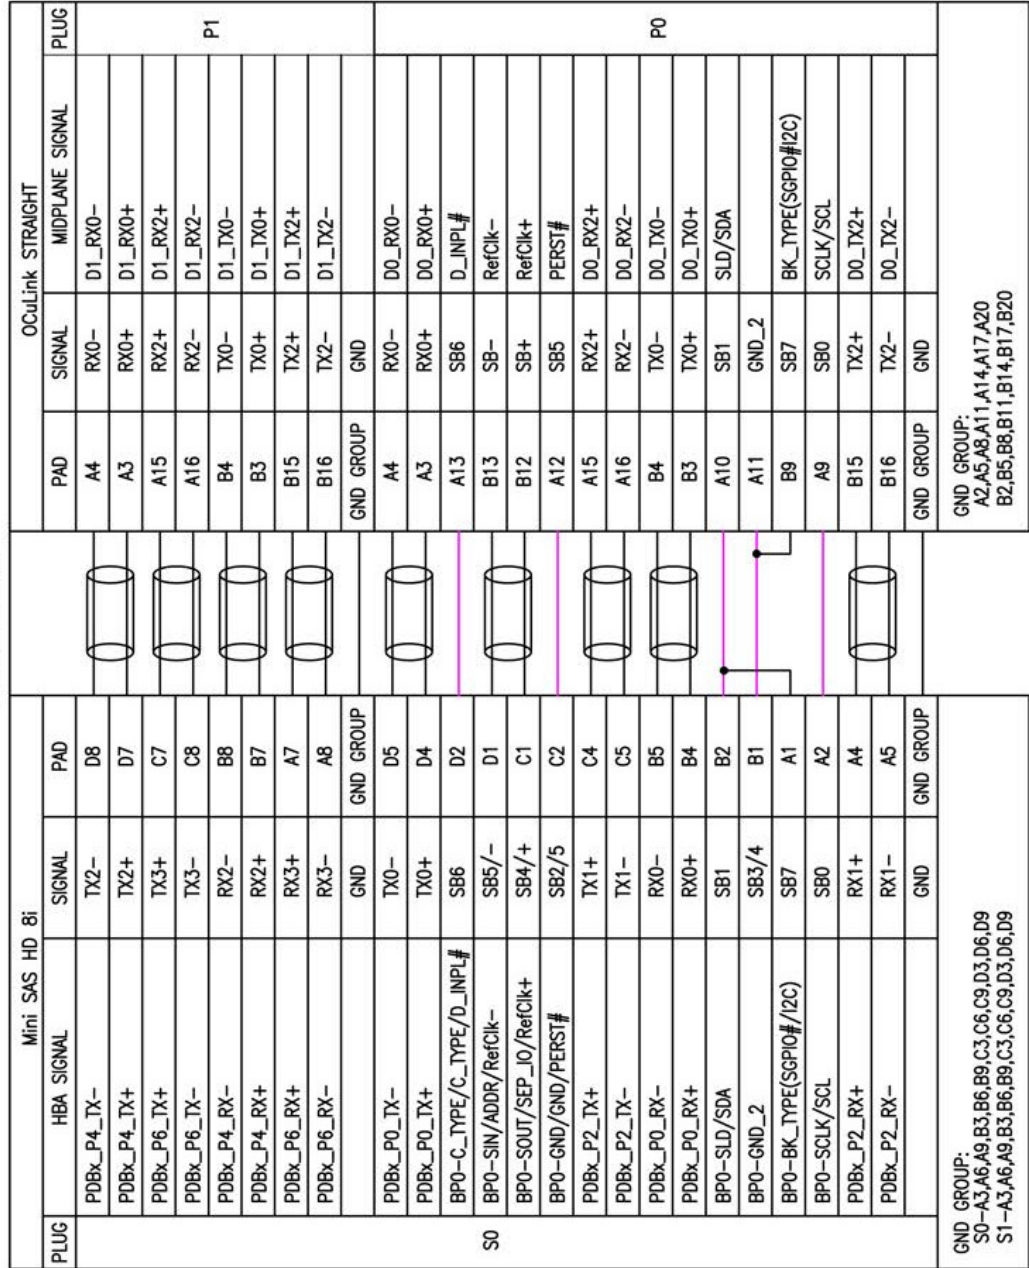

客製化接點, 共2頁



DESC. MiniSASHD8i TO OCuLink STRAIGHT Y CABLE ASSY
P/N B-5779 CUSTOMER P/N

APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT
		Sino				mm
DATE		DATE		DWG NO:		
12/07/16		12/07/16		DWG NO: DWG\B\5779		