




1	2	3	4	5	6	7	8	9
REV.	REMARK			DATE	SIGN.			
◇	REVISE SIGNAL			03/01/17	Sino			
◇	Add SIDEBANDS SIGNAL&GND GROUP 2, REVISE CABLE Q'TY			03/08/17	Sino			
◇	REVISE HBA SIGNAL			03/10/17	Sino			

WIRING DIAGRAM

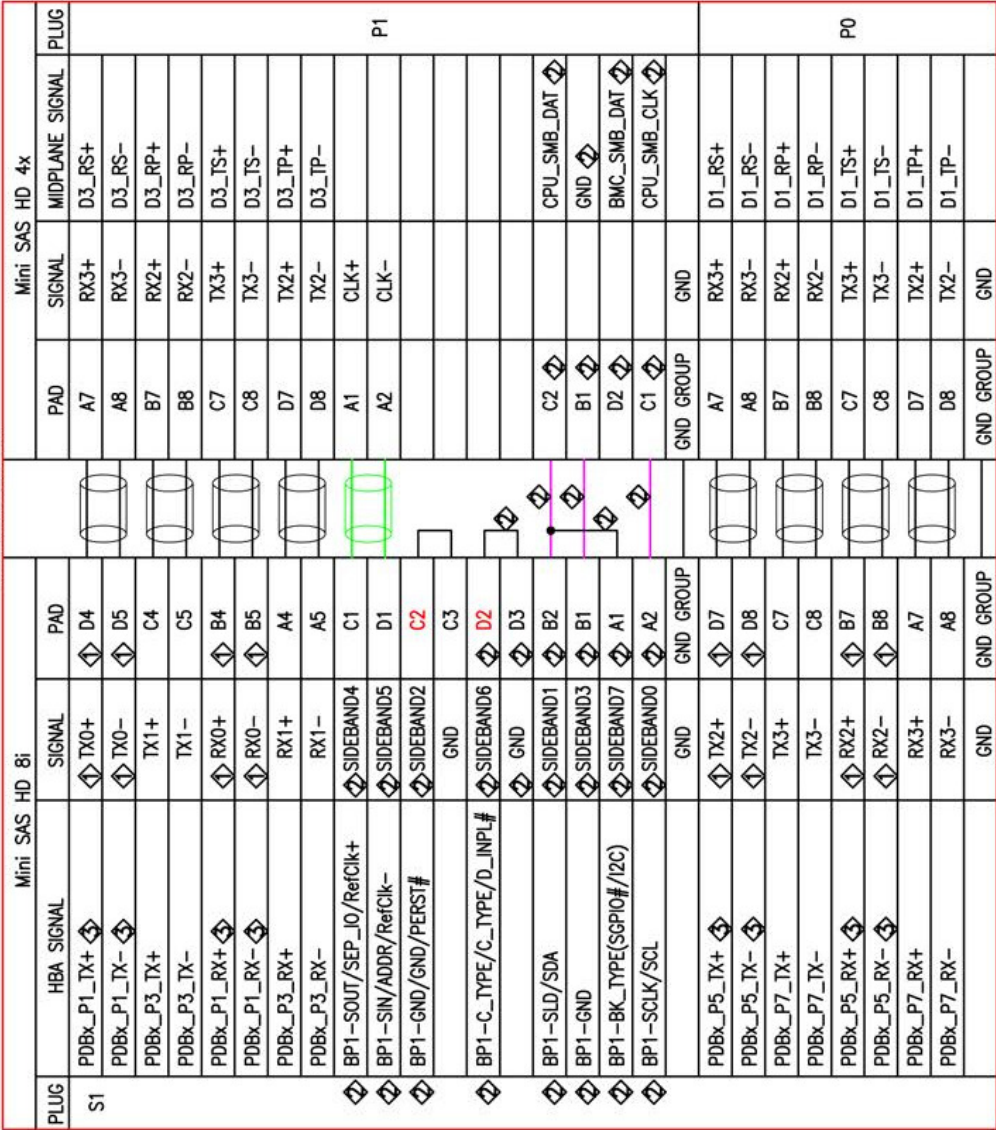

GND GROUP 1:  
S1-A3,A6,A9,B3,B6,B9, P0,P1-C3,C6,C9,D3,D6,D9  
GND GROUP 2:  
◇ S1-C2,C3,C6,C9,D2,D3,D6,D9, P0,P1-A3,A6,A9,B3,B6,B9

客製化接點, 第1頁, 共2頁



DESC. MiniSASHD8i TO MiniSASHD4x\*2 Y CABLE A ASS'Y  
P/N B-5868 CUSTOMER P/N PCI-438-4420-1M-S202

TOLERANCE  
DESIGNED Sino  
CHECKED  
APPROVED  
SCALE  
DATE 03/10/17  
DWG NO: DWG\B\5868



1	2	3	4	5	6	7	8	9
REV.	REMARK			DATE	SIGN.			
◇	REVISE SIGNAL			03/01/17	Sino			
◇	Add SIDEBANDS SIGNAL&GND GROUP 2, REVISE CABLE Q'TY			03/08/17	Sino			
◇	REVISE HBA SIGNAL			03/10/17	Sino			

WIRING DIAGRAM

Mini SAS HD 8i				Mini SAS HD 4x				
PLUG	HBA SIGNAL	SIGNAL	PAD	PAD	SIGNAL	MIDPLANE SIGNAL	PLUG	
S0	PDBx_P0_TX-	TX0-	D5	A5	RX1-	D2_RS-	P1	
	PDBx_P0_TX+	TX0+	D4	A4	RX1+	D2_RS+		
	PDBx_P2_TX-	◇ TX1-	C5	B5	RX0-	D2_RP-		
	PDBx_P2_TX+	◇ TX1+	C4	B4	RX0+	D2_RP+		
	PDBx_P0_RX-	RX0-	B5	C5	TX1-	D2_TS-		
	PDBx_P0_RX+	RX0+	B4	C4	TX1+	D2_TS+		
	PDBx_P2_RX-	◇ RX1-	A5	D5	TX0-	D2_TP-		
	PDBx_P2_RX+	◇ RX1+	A4	D4	TX0+	D2_TP+		
		GND	GND GROUP		GND			
	PDBx_P4_TX-	TX2-	D8	A5	RX1-	D0_RS-		P0
	PDBx_P4_TX+	TX2+	D7	A4	RX1+	D0_RS+		
	PDBx_P6_TX-	◇ TX3-	C8	B5	RX0-	D0_RP-		
	PDBx_P6_TX+	◇ TX3+	C7	B4	RX0+	D0_RP+		
	PDBx_P4_RX-	RX2-	B8	C5	TX1-	D0_TS-		
	PDBx_P4_RX+	RX2+	B7	C4	TX1+	D0_TS+		
	PDBx_P6_RX-	◇ RX3-	A8	D5	TX0-	D0_TP-		
PDBx_P6_RX+	◇ RX3+	A7	D4	TX0+	D0_TP+			
◇ BPO-SOUT/SEP_IO/RefClik+	◇ SIDEBAND 4	C1	A1	CLK+				
◇ BPO-SIN/ADDR/RefClik-	◇ SIDEBAND 5	D1	A2	CLK-				
◇ BPO-GND/GND/PERST#	◇ SIDEBAND 2	C2						
	GND	C3						
◇ BPO-C_TYPE/C_TYPE/D_INPL#	◇ SIDEBAND 6	D2						
	GND	D3						
◇ BPO-SLD/SDA	◇ SIDEBAND 1	B2	C2	◇	CPU_SMB_DAT			
◇ BPO-GND	◇ SIDEBAND 3	B1	B1	◇	GND			
◇ BPO-BK_TYPE(SCPIO#/I2C)	◇ SIDEBAND 7	A1	D2	◇	BMC_SMB_DAT			
◇ BPO-SCLK/SCL	◇ SIDEBAND 0	A2	C1	◇	CPU_SMB_CLK			
	GND	GND GROUP		GND				

客製化接點, 第2頁, 共2頁

GND GROUP 1:  
S0-A3,A6,A9,B3,B6,B9, P0,P1-C3,C6,C9,D3,D6,D9  
GND GROUP 2:  
◇ S0-C2,C3,C6,C9,D2,D3,D6,D9, P0,P1-A3,A6,A9,B3,B6,B9



DESC.	MiniSASHD8i TO MiniSASHD4x*2 Y CABLE A ASS'Y
P/N	B-5868
CUSTOMER P/N	PCI-438-442U-1M-S202

TOLERANCE	DESIGNED	CHECKED	APPROVED	SCALE	* UNIT
	Sino			DATE	mm
				03/10/17	DWG NO: DWG\B\5868