




REV.	REMARK	DATE	SIGN.
①	REVISE WIRING DIAGRAM	04/28/'16	Sino
②	REVISE SIDEBAND SIGNALS&CABLE	07/12/'16	Sino

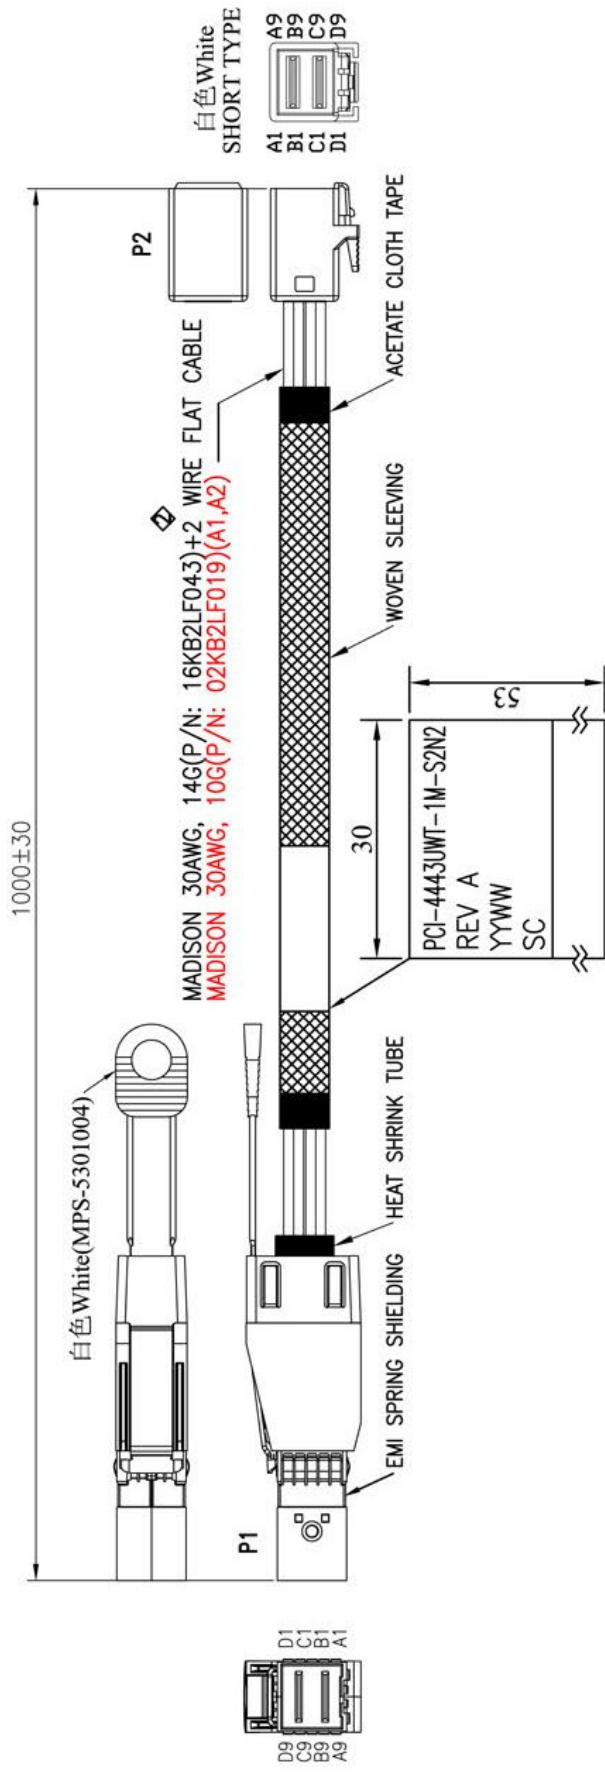

MATERIAL RoHS COMPLIANT:

1.CABLE: MADISON 30AWG, 14G(P/N: 16KB2LF043)  
 CONDUCTOR: 30AWG SOLID SILVER PLATED COPPER.  
 INSULATION: FOAM POLYOLEFIN.  
 PAIR: 2 SINGLES LAID FLAT AND PARALLEL.  
 PAIR DRAIN WIRE: 30AWG SOLID SILVER PLATED COPPER.  
 PAIR SHIELD: ALUMINUM/POLYESTER TAPE,  
 ALUMINUM SIDE FACING IN, 25% OVERLAP.  
 INNER SHIELD: ALUMINUM/POLYESTER TAPE,  
 ALUMINUM SIDE FACING OUT, 25% OVERLAP.  
 DIFFERENTIAL IMPEDANCE: 100±5 OHMS @1DR  
 UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725  
 OF THE NATIONAL ELECTRICAL CODE.

2.CABLE: MADISON 30AWG, 10G(P/N: 02KB2LF019)

3.CONNECTOR:

P1: SFF-8644 CABLE PLUG  
 (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS, WITHOUT CARBON  
 (P/N: MPCB-060003LF REV.B / MPCB-060004LF REV.B)  
 (2) LATCH: STAINLESS STEEL  
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING  
 (4) PULL TAB: NYLON UL94V-0, COLOR: WHITE(MPS-5301004)  
 (5) EMI SPRING SHIELDING

P2: SFF-8643 SHORT TYPE CABLE PLUG  
 (1) P.C.B: 4 LAYERS, GOLD PLATING ON CONTACT PADS, WITHOUT CARBON  
 (P/N: MPCB-040125LF REV.A / MPCB-040126LF REV.A)  
 (2) SHORT HOUSING: PBT, WHITE.

4.LABELING ON BAG:




DESC.	SFF8644 to SFF8643 WITH SIDEBAND Cable Assy	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm
P/N	B-5541			Sino					
CUSTOMER P/N	PCI-4443UWT-1M-S2N2								
							DATE	07/12/16	DWG NO: DWG B\5541

REV.	REMARK	DATE	SIGN.
◇	REVISE WIRING DIAGRAM	04/28/'16	Sino
◇	REVISE SIDEBAND SIGNALS&CABLE	07/12/'16	Sino

WIRING DIAGRAM

\*客製化接點

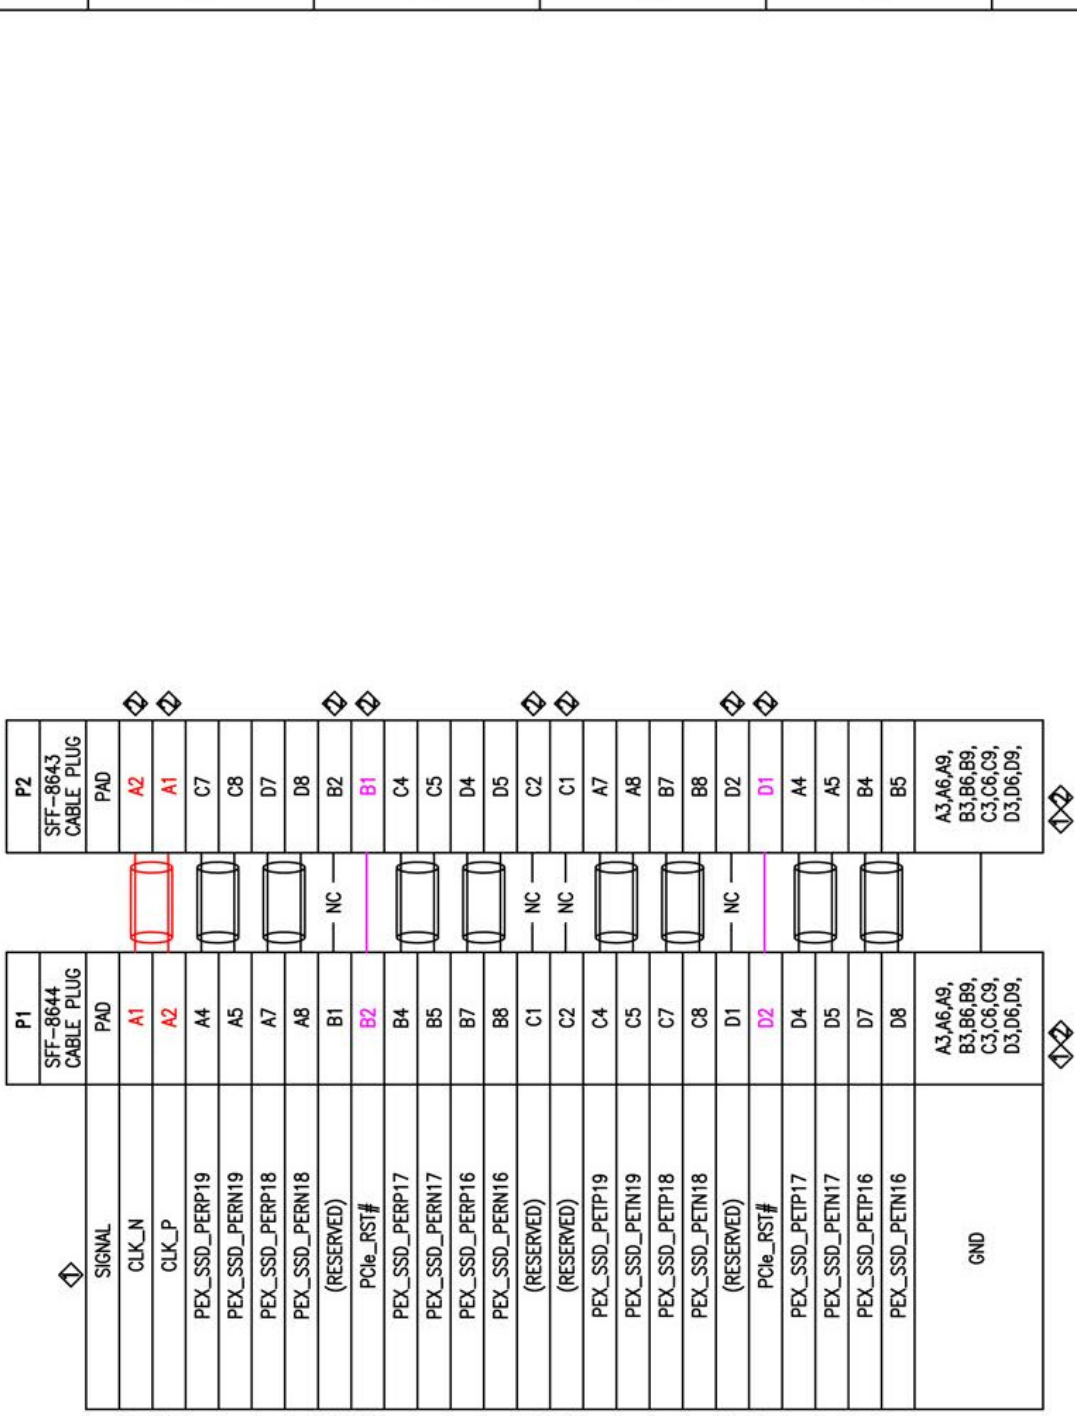

DESC.	SFF8644 to SFF8643 WITH SIDEBAND Cable Assy	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT
P/N	B-5541			Sino		DATE	07/12/'16	mm
	PCI-4443UMT-1M-S2N2					DWG NO:	DWG\B\5541	