


RoHS

REV.	REMARK	DATE	SIGN.

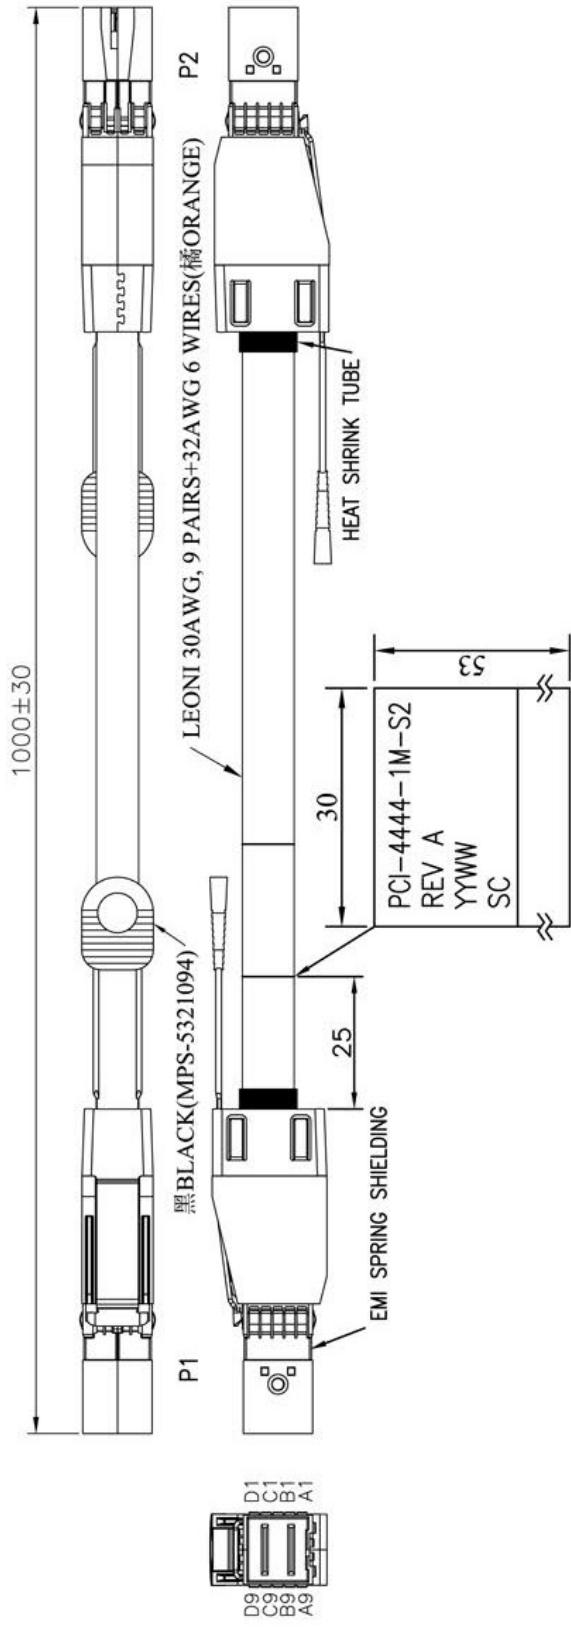

**MATERIAL RoHS COMPLIANT:**


1. CABLE SPEC (LEONI ParaLink):  
 9 PAIRS + 6 WIRES  
 (1) 9 PAIRS/30AWG SILVER PLATED COPPER  
 (2) 6 WIRES/32AWG TINNED COPPER

OVERALL SHIELD  
 (1) ALUMINATE FOIL OVERLAPPED  
 (2) TINNED COPPER BRAID, 85% COVERAGE

DIAMETER: 7.6±0.3mm  
 JACKET: PVC, COLOR: ORANGE

ELECTRICAL:  
 IMPEDANCE: 100±5 OHM (DIFFERENTIAL TDR)  
 PRINT LEGEND: "LEONI High Speed Cables ParaLink®"  
 100Q 9pairs 30AWG+ 6x32AWG "internal lot number"  
 \*sequential length in metres"

2.CONNECTOR:  
 P1,P2: Mini SAS HD 4x CABLE PLUG (SFF-8644)  
 (1) P.C.B: 6 LAYERS, GOLD PLATING ON CONTACT PADS.  
 (MPCB-060003LF REV.A / MPCB-060004LF REV.A)  
 (2) LATCH: STAINLESS STEEL  
 (3) BACKSHELL- ZINC DIE CASTING HOOD/ NICKEL PLATING  
 (4) PULL TAB: NYLON UL94V-0, COLOR: BLACK(MPS-5321094)  
 (5) EMI SPRING SHIELDING



3. LABELING ON BAG:




DESC.	MiniSASHD 4x with Sideband Cable Assembly
P/N	B-5158
CUSTOMER P/N	PCI-4444-1M-S2

DESIGNED	Sino	APPROVED	CHECKED	SCALE	TOLERANCE	DATE	07/08/15	DWG NO:	DWG\B\5158
UNIT	mm								

1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

**WIRING DIAGRAM 客製化接點**

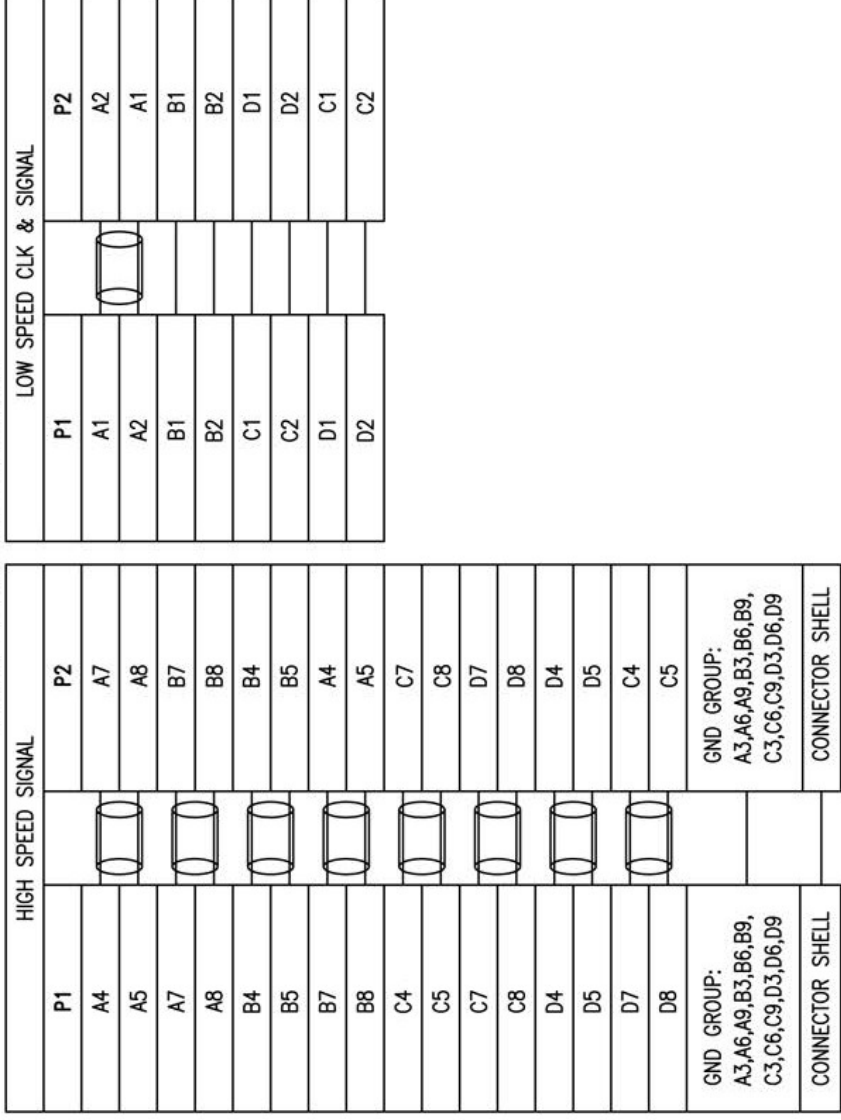

DESC.	MiniSASHD 4x with Sideband Cable Assembly		APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	
P/N	B-5158	CUSTOMER P/N	PCI-4444-1M-S2		Sino	*	DATE	07/08/'15	DWG NO:	DWG\B\5158	

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---