


1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

RoHS

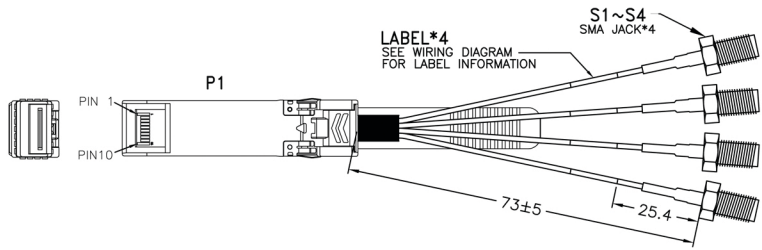

Material RoHS Compliant:

- CABLE: (SUHNER EZ_47_TP_M17 OR EZ_47_AL_TP)(MO-00122)
 CONDUCTOR: STEEL, COPPER+SILVER PLATED,WIRE, $\phi 0.29\text{mm}$
 DIELECTRIC: PTFE $\phi 0.93\text{ mm}$
 OUTER CONDUCTOR: COPPER/TP OR ALUMIUM/TP TUBE, 100%, $\phi 1.19\text{mm}$
 IMPEDANCE: $50 \pm 2.5\text{ OHM}$


2. CONNECTOR:

P1: SFP+ MODULE

- HOOD: ZINC DIE CASTING, NICKEL PLATING.
- LATCH: PC RESIN UL94V, COLOR IN BLACK.
- P.C.B.: 4 LAYERS, FR4. (SPCB-040077A)
- PULL TAB: NYLON UL94V-0, COLOR WHITE.

S1~S4: SMA JACK*4.

3. LABELING ON BAG:



4. WIRING DIAGRAM:

SFP+(P1)		SMA(S1~S4)	
PIN	SIGNAL	LABEL INFO.	
12	RX-		RX-
13	RX+		RX+
18	TX+		TX+
19	TX-		TX-
GND			CABLE BRAID

Serial Cables, LLC

DESC.	SFP+ TO SMA*4 CABLE			APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	
P/N	B-3537	CUSTOMER P/N	SA-31H73-4x			Justin		DATE	04/07/11	DWG NO	DWG B	3537

2

3

4

5

6

7

8

9