


REV.	REMARK	DATE	SIGN.
①	REVISE CABLE	11/23/'10	Sino
②	CHANGE CONNECTOR	12/08/'10	Sino

RoHS

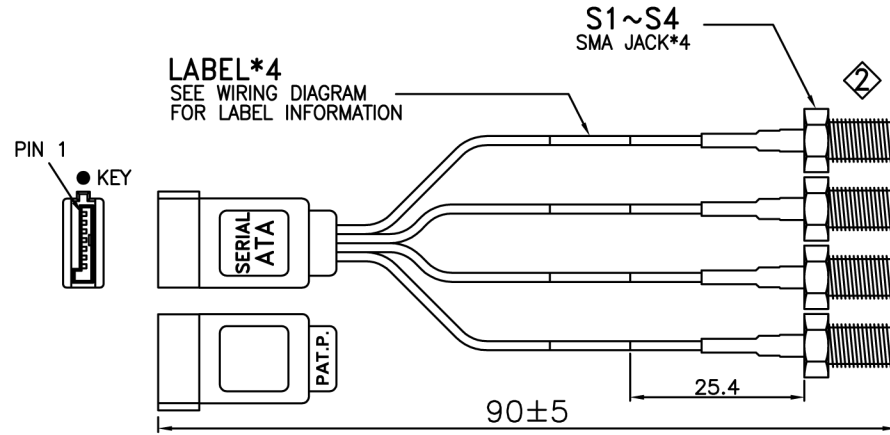

Material RoHS Compliant:

- ① 1. CABLE: (SUHNER EZ_47_TP_M17 OR EZ_47_AL_TP)
 CONDUCTOR: STEEL, COPPER+SILVER PLATED,WIRE, $\phi 0.29\text{mm}$
 DIELECTRIC: PTFE $\phi 0.93\text{ mm}$
 OUTER CONDUCTOR: COPPER/TP OR ALUMIUM/TP TUBE, 100%, $\phi 1.19\text{mm}$
 IMPEDANCE: $50 \pm 2.5\text{ OHM}$
- 2. CONNECTOR:
 P1: SATA INTERNAL CABLE RECEPTACLE W/O LATCH.
 ② S1~S4: SMA JACK*4.

3. LABELLING ON BAG:



4. WIRING DIAGRAM

SATA 7P(P1)		SMA(S1~S4)	
PIN	SIGNAL	LABEL INFO.	
2	A+	A+	
3	A-	A-	
5	B-	B-	
6	B+	B+	
1,4,7	GND	CABLE BRAID	

Serial Cables, LLC

DESC.	SATA 7P/SMA*4 CABLE ASSEMBLY			APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	*	UNIT	mm	
P/N	B-3014	CUSTOMER P/N	ST-7PSSMA-4x			Sino		DATE	12/08/'10	DWG NO:	DWG\B\3014	